
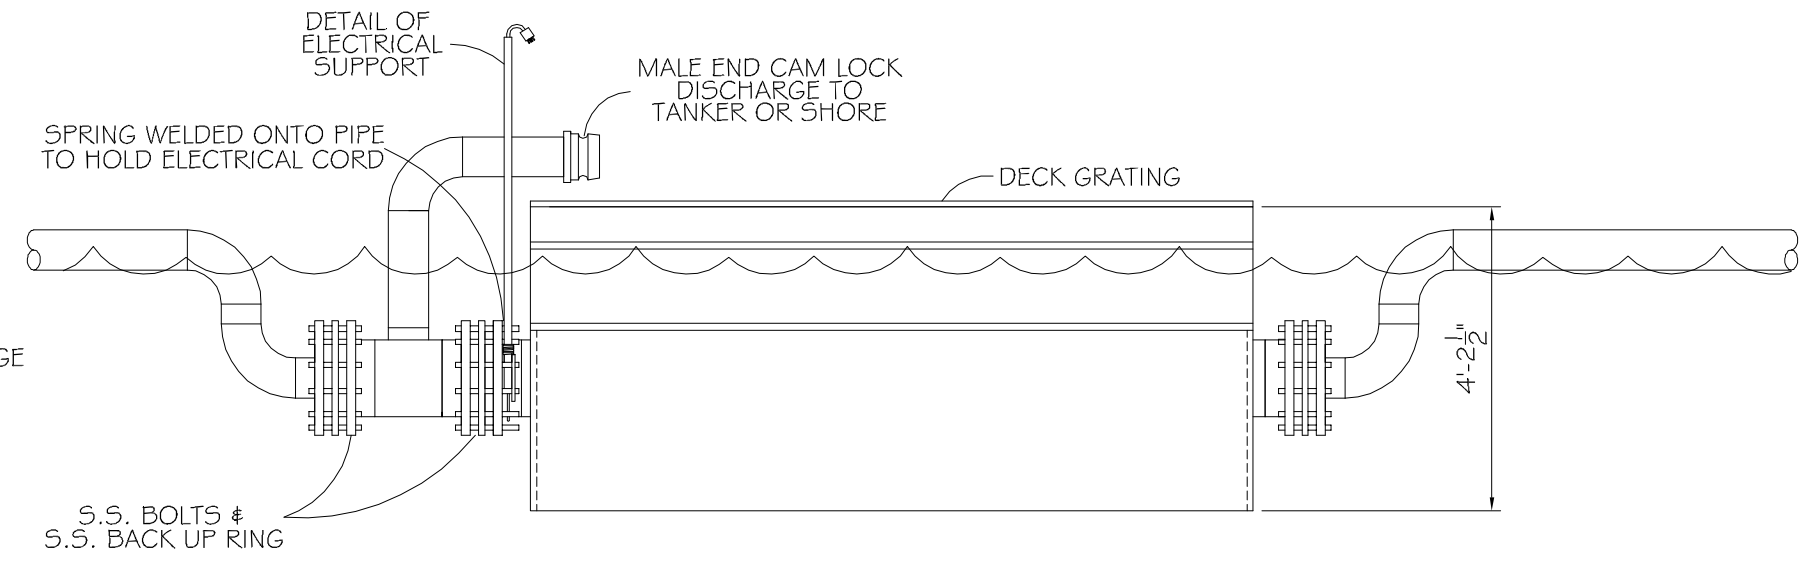
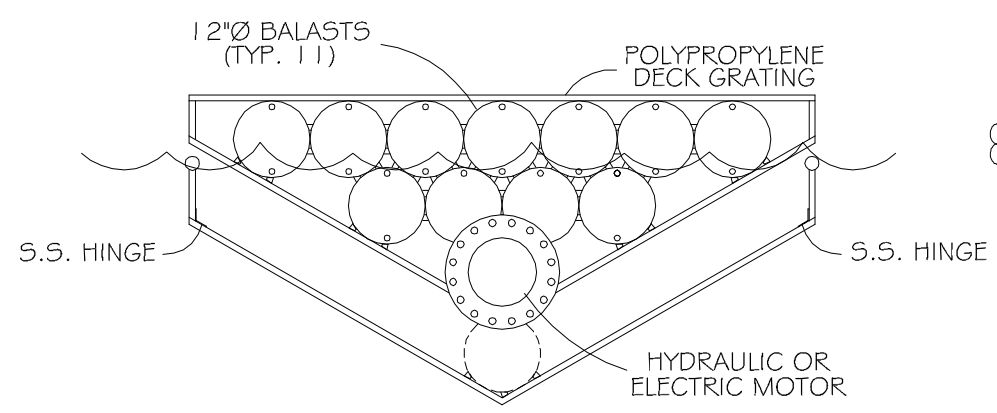
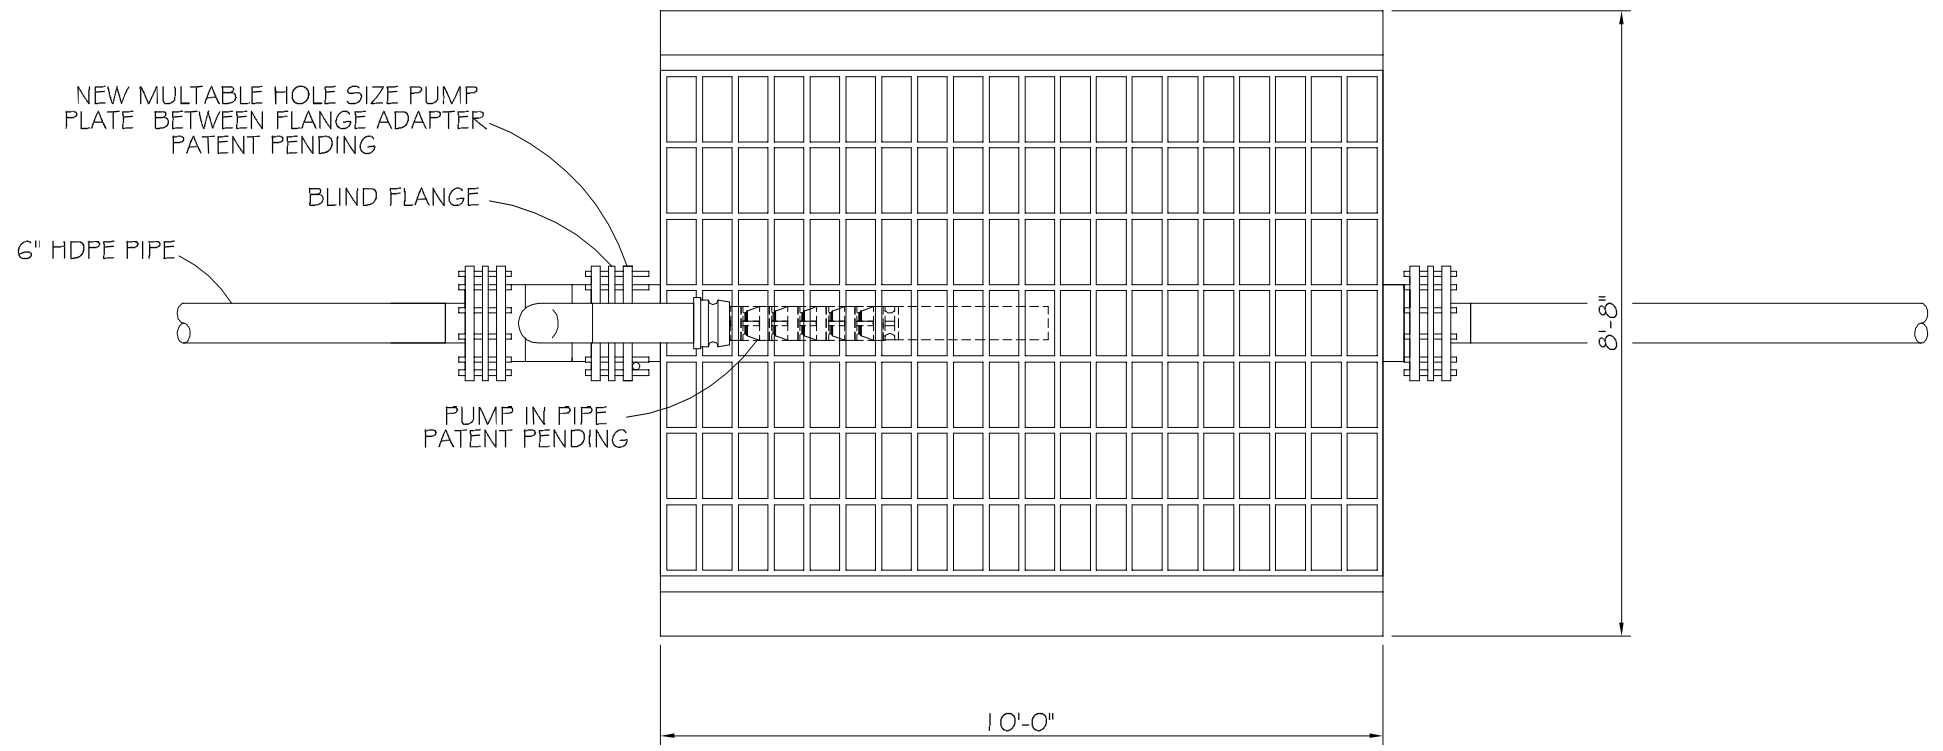


USE TWICE AS MUCH ROPE AS DEPTH, SO IF IT COMES UNHOOKED IT WILL FLOAT TO THE SURFACE.

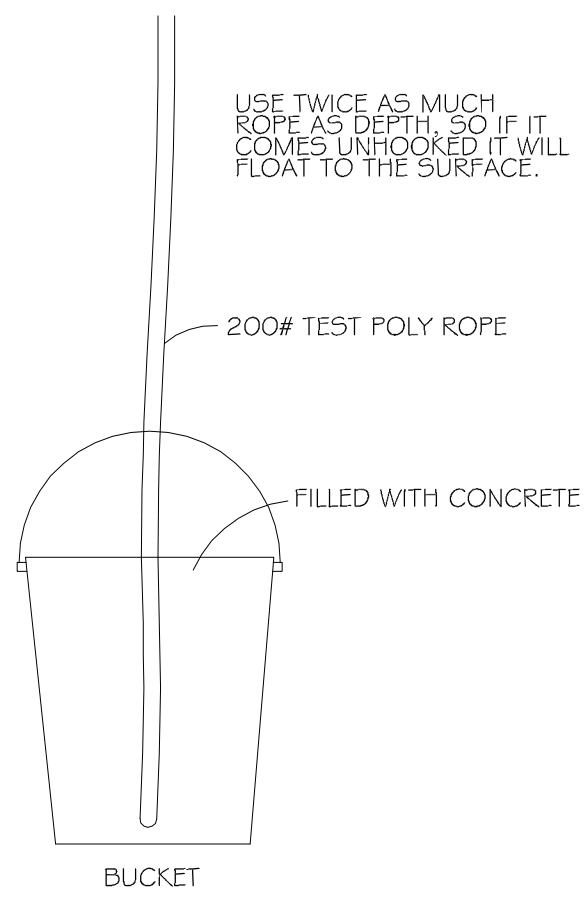

1. BULK HEAD WIRING CAN BE ON INSIDE OF PIPE OR FROM OUTSIDE OF PIPE FROM POWER SOURCES
2. CAN BE DEISGND AROUND ANY MAKE OF MODEL OF PUMP OR PUMPS

PATENT PENDING

SELF PURGING UNDERWATER SPLICE FOR UP TO 50,000 FT DEPTH

GPM PUMPING SYSTEMS

P.O. BOX 1621
 ENID, OKLAHOMA
 PHONE# 1-405-990-2531
 GMPUMPINGSYSTEM.COM

Revised: _____

SCALE: NTS

sheet: 3

3

of 3 sheet(s)
 Date: MAY 28, 2010